



A1 Series

15~18 Watts Switching Adapter

FEATURES

- Cispr 22'B', 'Vcci'B', Fcc'B' Compliance
- Light Weight: 180g only
- Efficiency Over 70%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Operating Temperature 0~40°C



SPECIFICATION

Item \ Model	A1-15S05	A1-18S05
Output Voltage	5V	5V
Output Current	3.0A	3.5A
Input Voltage	AC 90~264V	
Input Frequency	47~63Hz	
Input Current	0.6A Maximum	
Inrush Current	60A Maximum	
Line Regulation	2% Maximum	
Load Regulation	±5%	
Ripple & Noise	50mV Maximum	
Efficiency	72% Typical	74% Typical
Temperature Coefficient	0.05%/°C	
Over-Voltage Protection	Auto Recovery	
Short-circuit Protection	Auto Recovery	
Operating Temperature	0~40°C	
Storage Temperature	-20~85°C	
Safety	UL, CUL, TUV, PSE	
EMC (EMI/EMS)	C-TICK	

(*): Under Development (I/P): In Process (Pending): Pending


Above specification is for reference only, please contact for details.

Tel:+86-20-81628973	Fax:+86-20-81628967
e-mail:sales@ceetus.com.cn	Website:www.ceetus.com.cn






ORDERING INFORMATION

A1-15S05-1A

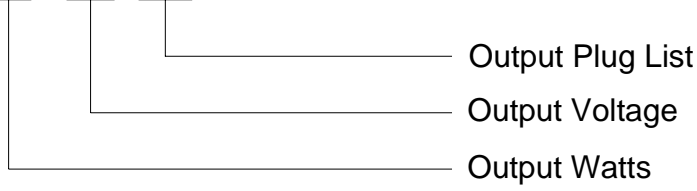

MECHANICAL

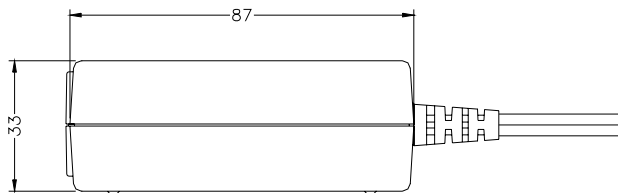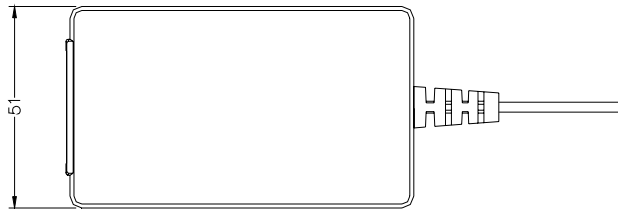

Unit: m.m.

Standard Output Cable:
18AWG, UL SPT-1, 1200mm

Tel:+86-20-81628973	Fax:+86-20-81628967
e-mail:sales@ceetus.com.cn	Website:www.ceetus.com.cn