




ADSL FREQUENCY FILTER INDUCTORS

P/N: ACKBB1PA

Page : 1/2

Feature

- Excellent THD performance in a small footprint.
- Used exclusively for frequency filtering.
- SMT compact footprint.
- Matched to various manufacturers' ADSL chipsets.
- RoHS compliant.




Electrical Specifications @ 25°C

Part Number	Application	Turns Ratio (±2%)	Inductance (μH MAX ±5%)	DC Resistance (MAX)	HI-POT (VDC)
ACKBB1PA	CPE	1:1	5.0	0.71	600

* Operating temperature range : 0°C to +70°C. Storage temperature range: -25°C to +125°C.

Schematic

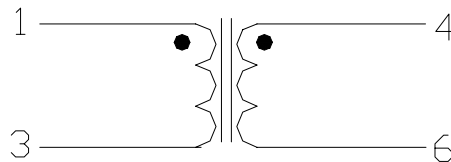


Mechanical

Tel:+86-20-81628973	Fax:+86-20-81628967
E-mail:sales@ceetus.com.cn	Website:www.ceetus.com.cn



ADSL FREQUENCY FILTER INDUCTORS

P/N: ACKBB1PA

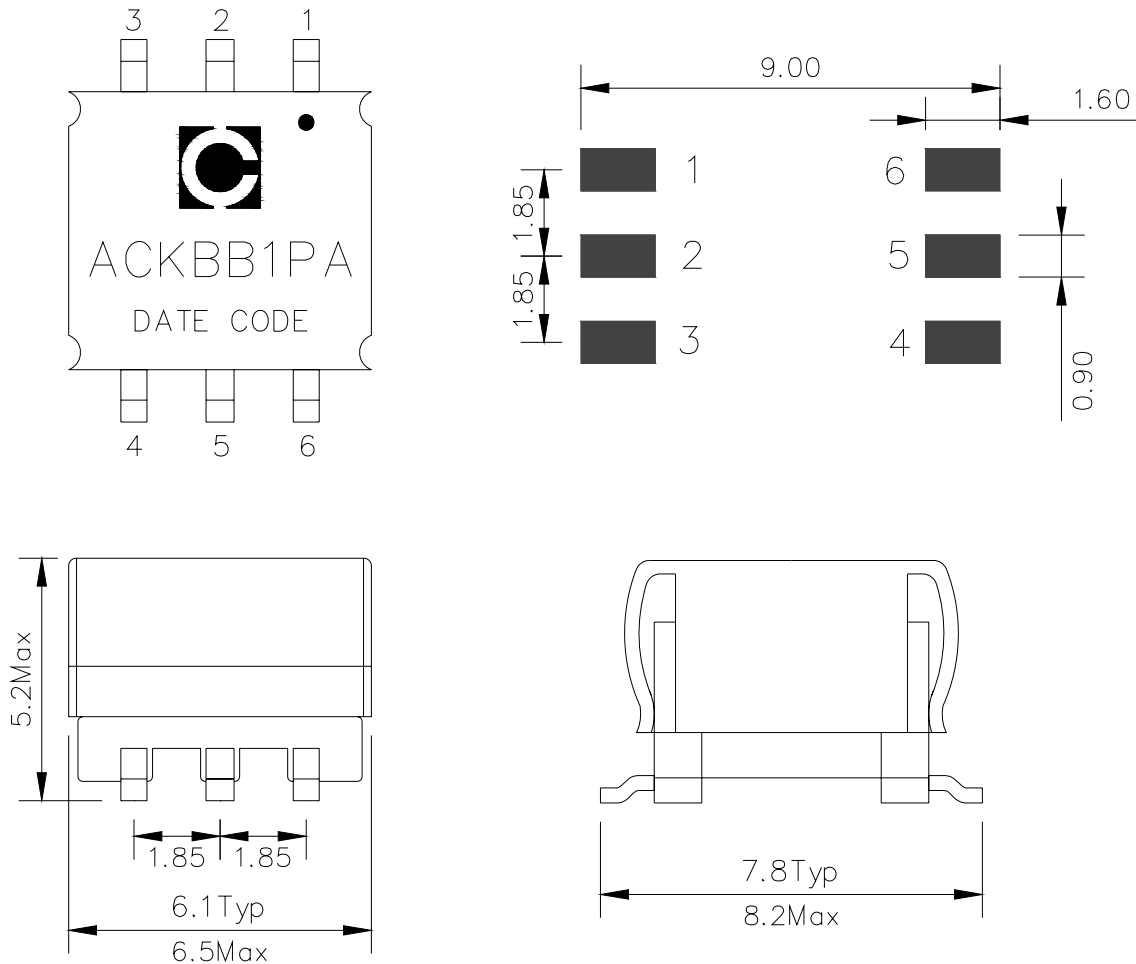

Tolerance: ± 0.25 (0.010) unless specified otherwise.

NOTE:

Datasheet Change History:

V0	2007/Mar.	Datasheet Set Up

Tel:+86-20-81628973

Fax:+86-20-81628967

E-mail:sales@ceetus.com.cn

Website:www.ceetus.com.cn