



FEATURES

- CE Certification
- IEC60950-1 ; EN60950-1 Compliance
- Light Weight: 115g only
- Input & Output protection
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Operating Temperature 0~40°C



SPECIFICATION


Item	Model	CTSP01-1824EU
Output Voltage		24V
Output Current		0.75A
Input Voltage		AC100~240V
Input Frequency		47~63Hz
Input Current		0.4A Maximum
Inrush Current		15A Maximum
Line Regulation		5% Maximum
Load Regulation		±5%
Ripple & Noise		250mV Maximum
Efficiency		83% Typical
Temperature Coefficient		0.05%/°C
Over-Voltage Protection		Auto Recovery
Short-circuit Protection		Auto Recovery
Operating Temperature		0~40°C
Storage Temperature		-10~+70°C
Safety		CE
EMC (EMI/EMS)		EN55022 (EN61000-3-2, EN61000-3-3) EN55024 (IEC61000-4-2, IEC61000-4-3, IEC61000-4-6, IEC61000-4-8, IEC61000-4-11)

Above specification is for reference only, please contact for details.

Tel: +86-20-81803473	Fax: +86-20-88192702
E-mail: sales@cetus.com.cn	Website: www.cetus.com.cn



MECHANICAL

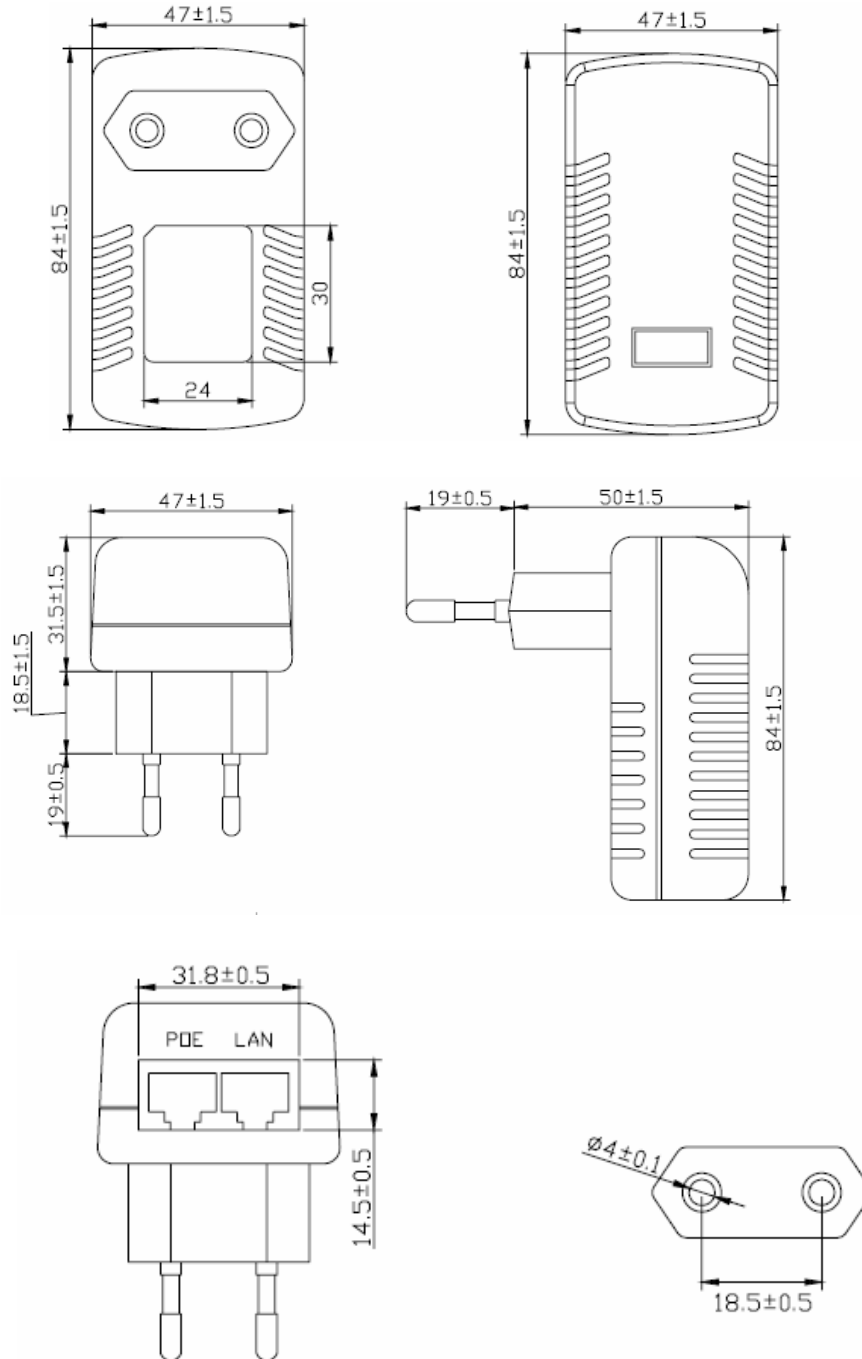

Tel: +86-20-81803473

E-mail: sales@cetus.com.cn

Fax: +86-20-88192702

Website: www.cetus.com.cn