



**CTSP01-2048EU**

**19.2 Watts** Switching Adapter

## FEATURES

- CE Certification
- EN55022 ; EN55024 Compliance
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Efficiency up to 80%
- Light Weight: 103g



## SPECIFICATION


Item \ Model	CTSP01-2048EU
Output Voltage	48V
Output Current	0.4A
Input Voltage	AC100~240V
Input Frequency	47~63Hz
Input Current	0.45A Maximum
Inrush Current	20A Maximum
Line Regulation	5% Maximum
Load Regulation	±5%
Ripple & Noise	300mV Maximum
Leakage Current	0.5Ma Max(at 240VAC input)
Temperature Coefficient	0.05%/°C
Over-Voltage Protection	Auto Recovery
Over-Current Protection	0.6~0.7A
Input protection	Has a 1.5A/250V inner current fuse
Short-circuit Protection	Auto Recovery
Operating Temperature	0~40°C
Storage Temperature	-10~+70°C
Safety	IEC60950-1; EN60950-1
EMC (EMI/EMS)	EN55022 (EN61000-3-2, EN61000-3-3) EN55024 (IEC61000-4-2, IEC61000-4-3, IEC61000-4-6, IEC61000-4-8, IEC61000-4-11)

Above specification is for reference only, please contact for details.

<b>Tel:+86-20-81803473</b>	<b>Fax:+86-20-88192702</b>
<b>E-mail:sales@cetus.com.cn</b>	<b>Website:www.cetus.com.cn</b>



### MECHANICAL


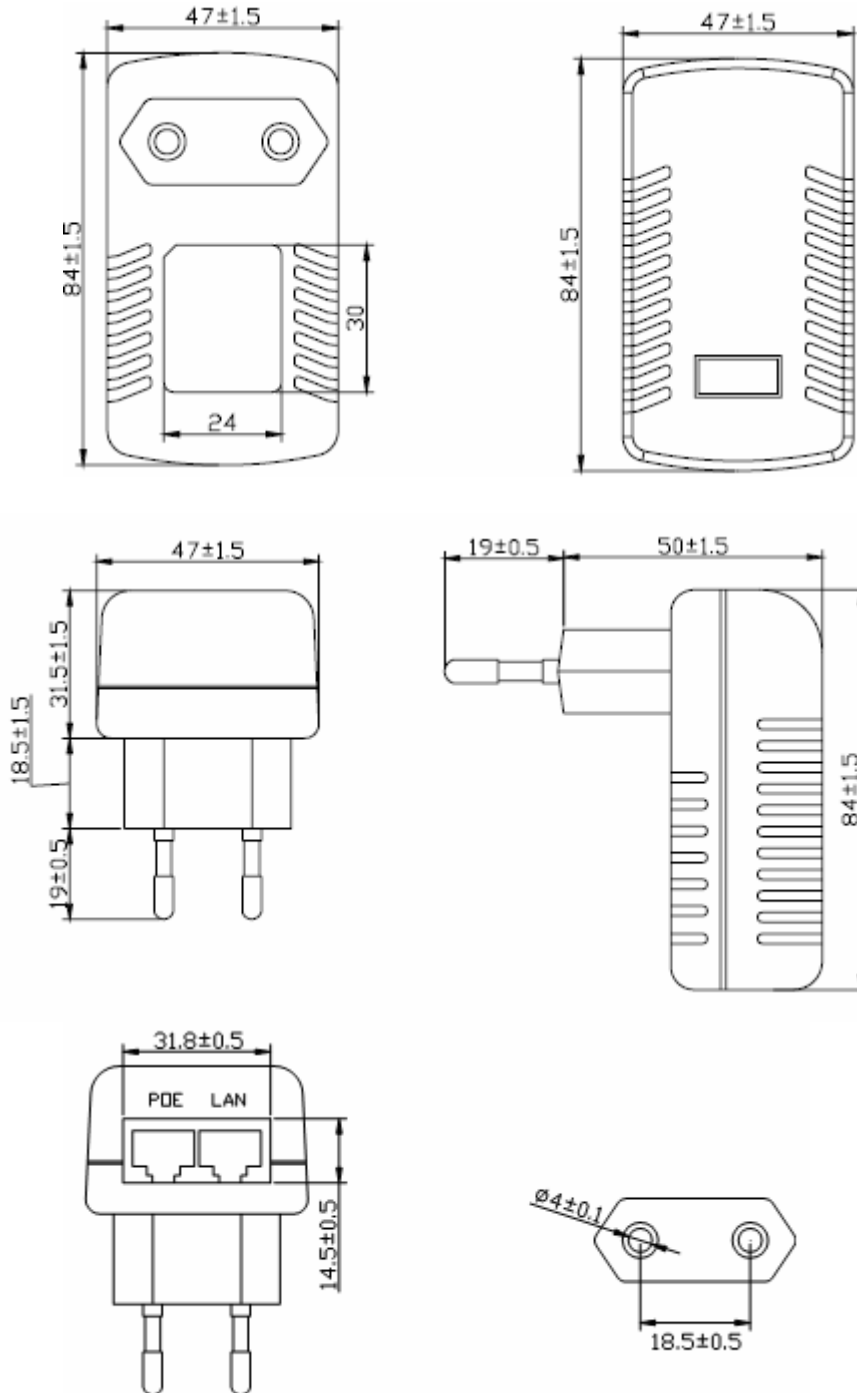


Tel: +86-20-81803473

E-mail: sales@cetus.com.cn

Fax: +86-20-88192702

Website: www.cetus.com.cn

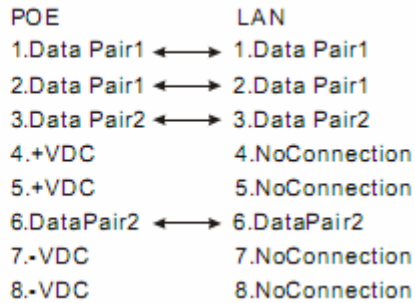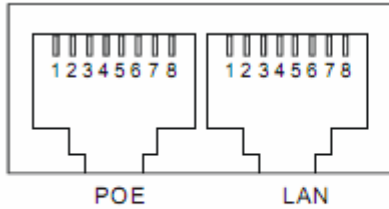

### Datasheet Change History:

V0		Datasheet Set Up

Tel:+86-20-81803473	Fax:+86-20-88192702
E-mail:sales@cetus.com.cn	Website:www.cetus.com.cn