



## CONTENTS 【1】

### Desk-Top Adapter, Single Output

<a href="#">SA06H</a> Series: 30Watts (12~24V) -----	P.2
<a href="#">SA06L</a> Series: 6~15Watts (3.3~13V) -----	P.4
<a href="#">SA06L48</a> Series: 19Watts (48V) for POE -----	P.6
<a href="#">SA06N</a> Series: 13~24Watts (3.3~15V) -----	P.8
<a href="#">SA06-..S</a> Series: 10~15Watts (5~24V) CEC Compliance -----	P.10
<a href="#">SA06-20(24)(30)S</a> Series: 20~30Watts (5~24V) CEC Compliance -----	P.12
<a href="#">A1</a> Series: 15~18Watts (5V) -----	P.14
<a href="#">A2-36S</a> Series: 36Watts (12~17V) -----	P.16
<a href="#">A2-36SG</a> Series: 36Watts (12~17V) CEC Compliance -----	P.18
<a href="#">A3-50(60)S</a> Series: 50~60Watts (12~24V) CEC Compliance -----	P.20
<a href="#">A7-80(90)S</a> Series: 80~90Watts (12~24V) CEC Compliance : Active PFC -----	P.22

### Desk-Top Adapter, Multiple Output

<a href="#">A2-..D01</a> Series: 25~29Watts (Dual Output) -----	P.24
<a href="#">T40-9312</a> Series: 43Watts (Triple Output) -----	P.26
<a href="#">SP9812</a> Series: 25Watts (Dual Output) -----	P.28
<a href="#">Output Plug List</a> -----	P.30



## SA06H Series

## 30 Watts Switching Adapter

### FEATURES

- Cispr 22'B', Vcci'B', Fcc'B' Compliance
- Light Weight: 220g only
- Efficiency 84%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Operating Temperature 0~40°C



### SPECIFICATION

Item \ Model	SA06H1217	SA06H1724
Output Voltage	12~17V	17~24V
Output Rating	30W Max	30W Max
Input Voltage	AC 90~264V	
Input Frequency	47~63Hz	
Input Current	1.0A Maximum	
Inrush Current	60A Maximum	
Line Regulation	2% Maximum	
Load Regulation	±5%	
Ripple & Noise	1% Maximum	
Efficiency	84% Typical	86% Typical
Temperature Coefficient	0.05%/°C	
Over-Voltage Protection	Auto Recovery	
Short-circuit Protection	Auto Recovery	
Operating Temperature	0~40°C	
Storage Temperature	-20~85°C	
Safety	UL, CUL, TUV, CB, BSMI, PSE	
EMC (EMI/EMS)	CE, BSMI	

(\*): Under Development (I/P): In Process (Pending): Pending

Above specification is for reference only, please contact for details.

**Tel:+86-20-81628973**

**Fax:+86-20-81628967**

**e-mail:sales@ceetus.com.cn**

**Website:www.ceetus.com.cn**




## ORDERING INFORMATION

SA06H12-1A

Output Plug List

Output Voltage: 12 --- 12.0V  
13V8 --- 13.8V

## MECHANICAL

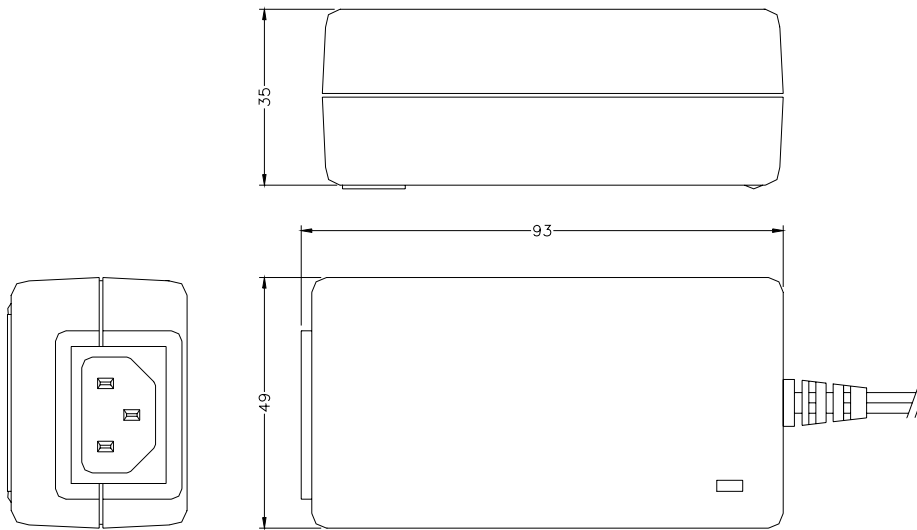

Unit: m.m.

Standard Output Cable:  
18AWG, UL SPT-1, 1200mm

**Tel:+86-20-81628973**

**e-mail:sales@ceetus.com.cn**

**Fax:+86-20-81628967**

**Website:www.ceetus.com.cn**



## SA06L Series

## 6~15 Watts Switching Adapter

### FEATURES

- Cispr 22'B', Vcci'B', Fcc'B' Compliance
- Light Weight: 180g only
- Efficiency Over 70%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Operating Temperature 0~40°C



### SPECIFICATION

Item \ Model	SA06L3V3	SA06L0507	SA06L0810	SA06L1113
Output Voltage	3.3	5~7V	8~10V	11~13V
Output Rating	2.0A	10W Max	10W Max	15W Max
Input Voltage	AC 90~264V			
Input Frequency	47~63Hz			
Input Current	0.5A Maximum			
Inrush Current	40A Maximum			
Line Regulation	2% Maximum			
Load Regulation	±5%			
Ripple & Noise	1% Typical			
Efficiency	68~79% Typical			
Temperature Coefficient	0.05%/°C			
Over-Voltage Protection	Auto Recovery			
Short-circuit Protection	Auto Recovery			
Operating Temperature	0~40°C			
Storage Temperature	-20~85°C			
Safety	UL, CUL, TUV, CB, LPS, BSMI, PSE			
EMC (EMI/EMS)	CE, FCC, BSMI			

(\*): Under Development (I/P): In Process (Pending): Pending

Above specification is for reference only, please contact for details.

<b>Tel:+86-20-81628973</b>	<b>Fax:+86-20-81628967</b>
<b>e-mail:sales@ceetus.com.cn</b>	<b>Website:www.ceetus.com.cn</b>




## ORDERING INFORMATION

SA06L05-U-1A

- Output Plug List
- Mechanical
- Output Voltage: 05 --- 5.0V  
5V5 --- 5.5V

## MECHANICAL

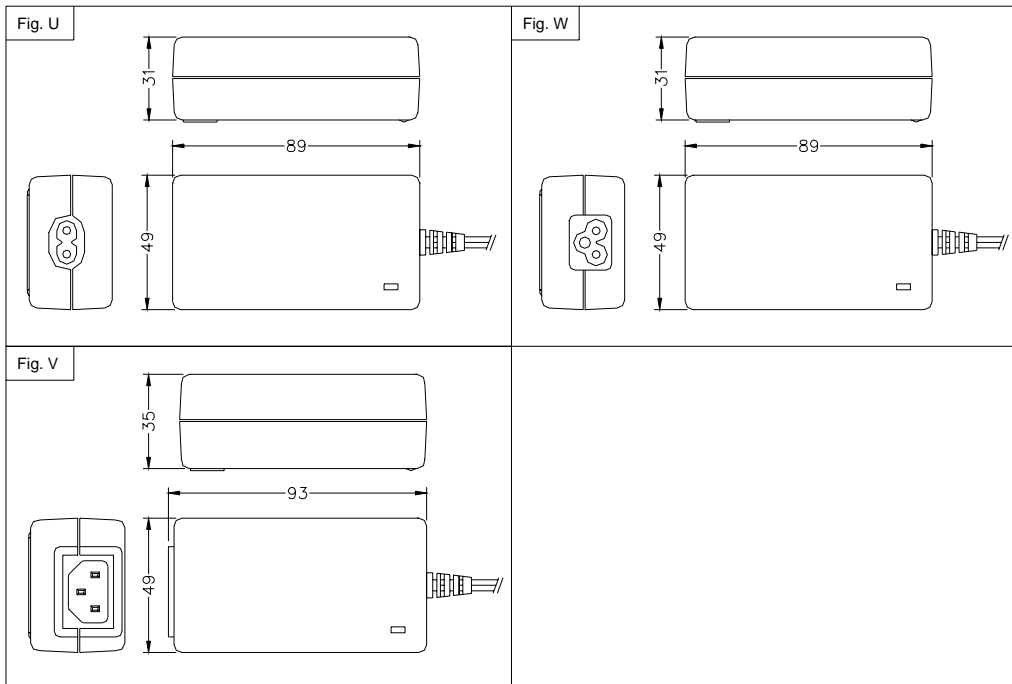

Unit: m.m.

Standard Output Cable:  
3.3~5V: 18AWG, UL SPT-1, 1800mm.  
6~13V: 20AWG, UL 2468, 1800mm.

**Tel:+86-20-81628973**

**Fax:+86-20-81628967**

**e-mail:sales@ceetus.com.cn**

**Website:www.ceetus.com.cn**



## SA06L48 Series

## 19 Watts Switching Adapter

### FEATURES

- Cispr 22'B', Vcci'B', Fcc'B' Compliance
- Light Weight: 210g only
- Efficiency Over 75%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Operating Temperature 0~40°C



### SPECIFICATION

Item	Model	SA06L48
Output Voltage		48V
Output Rating		0.4A
Input Voltage		AC 90~264V
Input Frequency		47~63Hz
Input Current		0.5A Maximum
Inrush Current		40A Maximum
Line Regulation		2% Maximum
Load Regulation		±5%
Ripple & Noise		1% Typical
Efficiency		83% Typical
Temperature Coefficient		0.05%/°C
Over-Voltage Protection		Auto Recovery
Short-circuit Protection		Auto Recovery
Operating Temperature		0~40°C
Storage Temperature		-20~85°C
Safety		UL, CUL, TUV, CB, BSMI, PSE, CCC, DOIR
EMC (EMI/EMS)		C-TICK, BSMI

(\*): Under Development (I/P): In Process (Pending): Pending

Above specification is for reference only, please contact for details.

<b>Tel:+86-20-81628973</b>	<b>Fax:+86-20-81628967</b>
<b>e-mail:sales@ceetus.com.cn</b>	<b>Website:www.ceetus.com.cn</b>




## ORDERING INFORMATION

SA06L48-V-1A

Output Plug List

Mechanical

## MECHANICAL

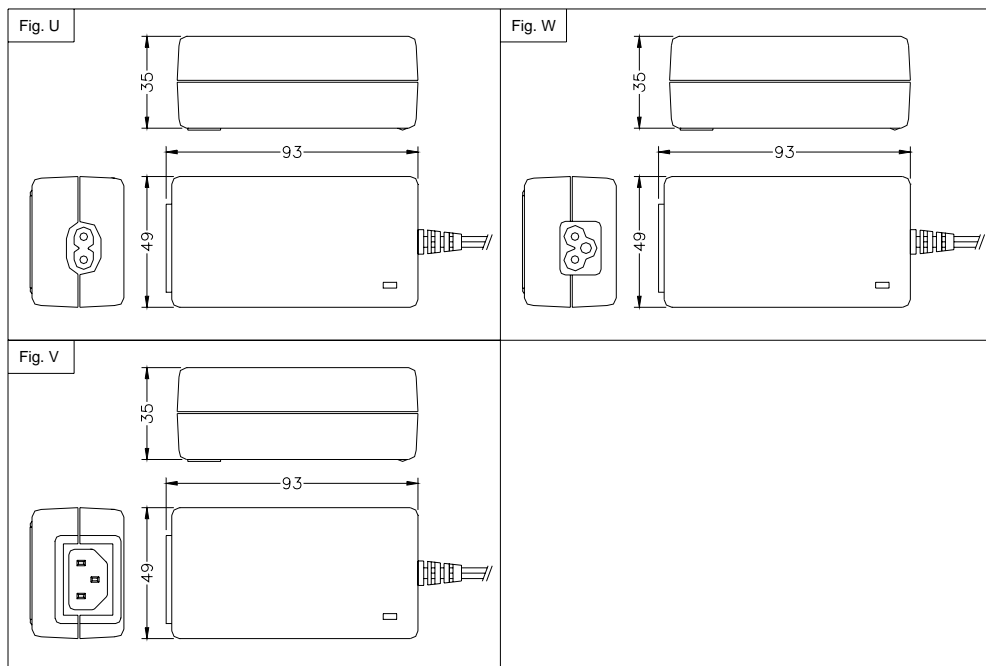

Unit: m.m.

Standard Output Cable:  
20AWG, UL 2468, 1800mm

**Tel:+86-20-81628973**

**e-mail:sales@ceetus.com.cn**

**Fax:+86-20-81628967**

**Website:www.ceetus.com.cn**



<

## SA06N Series

## 13~24 Watts Switching Adapter

### FEATURES

- Cispr 22'B', Vcci'B', Fcc'B' Compliance
- Light Weight: 210g only
- Efficiency 69~81%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Operating Temperature 0~40°C



### SPECIFICATION

Model	SA06N3V3	SA06N05	SA06N06	SA06N7V5	SA06N09	SA06N12	SA06N15
Item							
Output Voltage	3.3V	5V	6V	7.5V	9V	12V	15V
Output Current	4.0A	4.0A	3.0A	2.6A	2.0A	2.0A	1.6A
Input Voltage	AC 90~264V						
Input Frequency	47~63Hz						
Input Current	0.8A Maximum						
Inrush Current	40A Maximum						
Line Regulation	2% Maximum						
Load Regulation	±5%						
Ripple & Noise	1% Maximum						
Efficiency	69~81% Typical						
Temperature Coefficient	0.05%/°C						
Over-Voltage Protection	Auto Recovery						
Short-circuit Protection	Auto Recovery						
Operating Temperature	0~40°C						
Storage Temperature	-20~85°C						
Safety	UL, CUL, TUV, CB, LPS, BSMI, PSE, DOIR						
EMC (EMI/EMS)	CE, BSMI						

(\*): Under Development (I/P): In Process (Pending): Pending

Above specification is for reference only, please contact for details.

**Tel:+86-20-81628973**

**Fax:+86-20-81628967**


**e-mail:sales@ceetus.com.cn**

**Website:www.ceetus.com.cn**




## ORDERING INFORMATION

SA06N05-U-1A

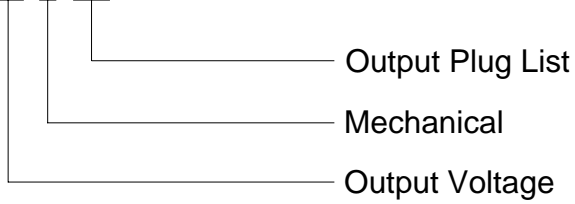

## MECHANICAL

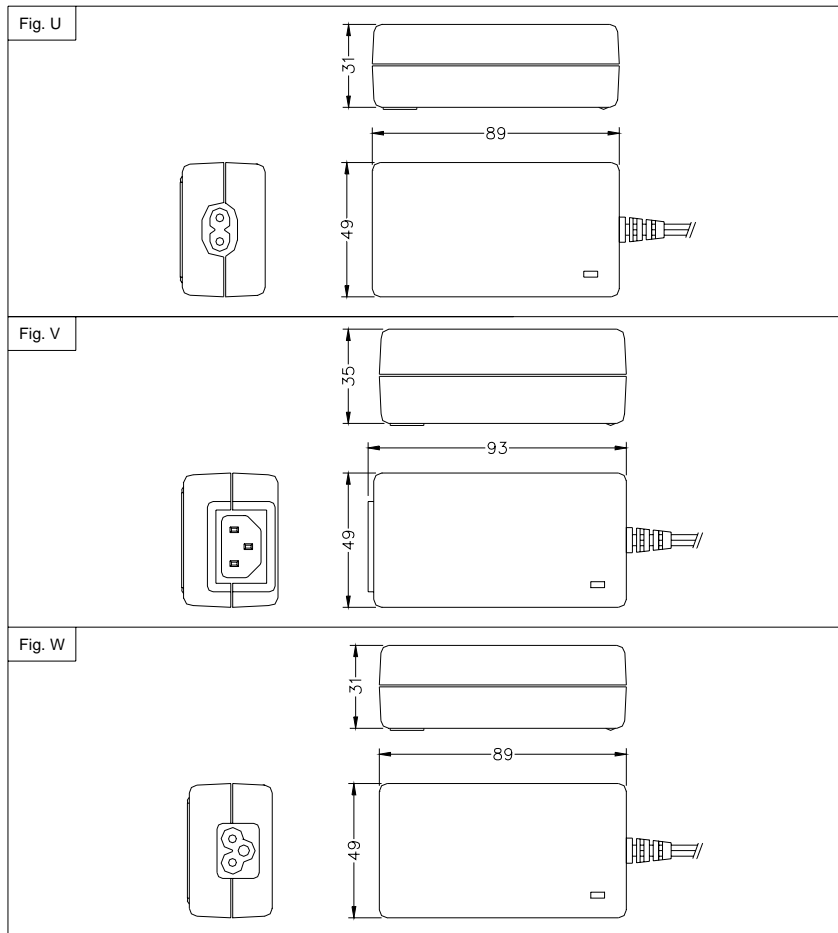

Unit: m.m.

Standard Output Cable:  
3.3~7.5V: 18AWG, UL SPT-1, 1200mm, EMI Core.  
9~15V: 20AWG, UL 2468, 1800mm, EMI Core

**Tel:+86-20-81628973**

**Fax:+86-20-81628967**

**e-mail:sales@ceetus.com.cn**

**Website:www.ceetus.com.cn**



## SA06-..S Series

## 12~18 Watts Switching Adapter

### FEATURES

- CEC Efficiency Regulations Compliance
- Cispr 22'B', Vcci'B', Fcc'B' Compliance
- Light Weight: 190g only
- Efficiency 73~82%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Operating Temperature 0~40°C



### SPECIFICATION

Item \ Model	* SA06-12S05R	* SA06-15S07R	* SA06-15S09R	* SA06-15S12R	* SA06-18S17R
Output Voltage	5~7V	7~9V	9~12V	12~17V	17~24V
Output Power	12.5W	15W	15W	15W	18W
Input Voltage	AC 90~264V				
Input Frequency	47~63Hz				
Input Current	0.6A Maximum				
Inrush Current	50A Maximum				
Line Regulation	2% Maximum				
Load Regulation	±5%				
Ripple & Noise	1% Maximum				
Efficiency	73~82% Typical				
Temperature Coefficient	0.05%/°C				
Over-Voltage Protection	Auto Recovery				
Short-circuit Protection	Auto Recovery				
Operating Temperature	0~40°C				
Storage Temperature	-20~85°C				
Safety	Pending				
EMC (EMI/EMS)	Pending				


(\*): Under Development (I/P): In Process (Pending): Pending  
 Above specification is for reference only, please contact for details.

<b>Tel:+86-20-81628973</b>	<b>Fax:+86-20-81628967</b>
<b>e-mail:sales@ceetus.com.cn</b>	<b>Website:www.ceetus.com.cn</b>




## ORDERING INFORMATION

### SA06-12S055-U-1A

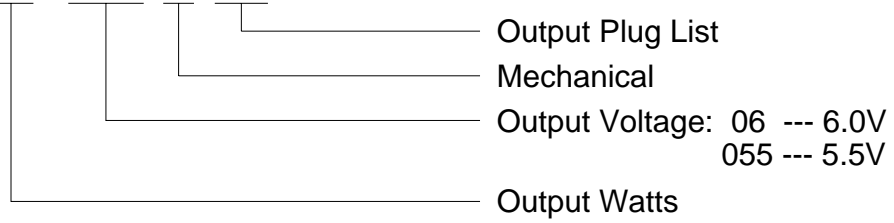

## MECHANICAL

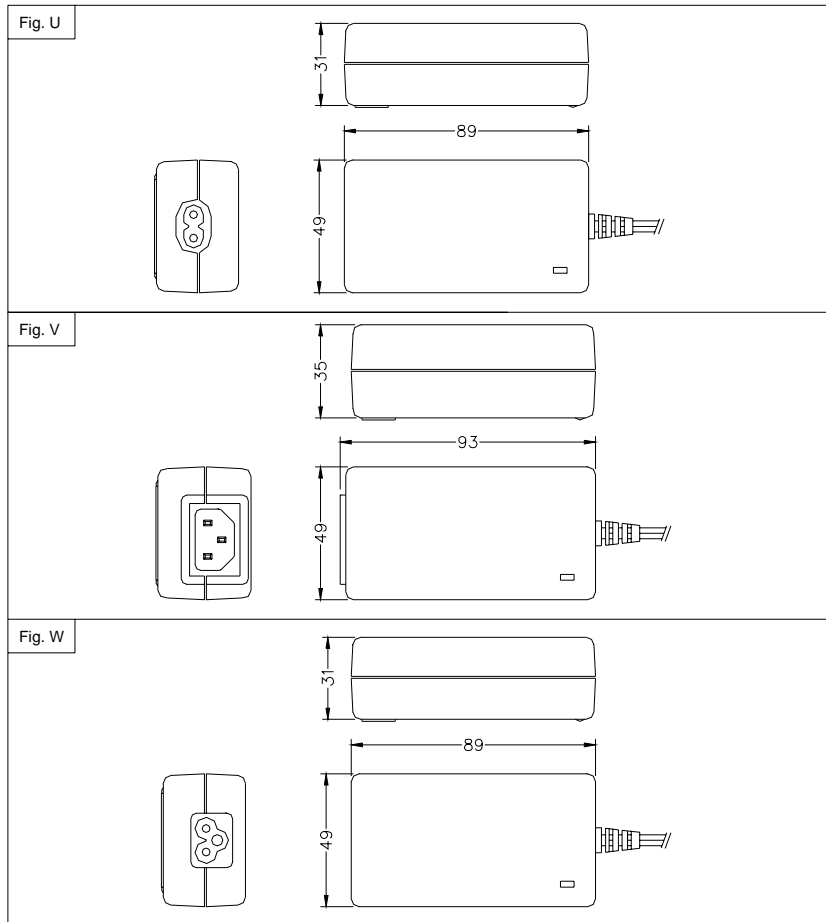

Unit: m.m.

Standard Output Cable:  
 5~7V: 18AWG, UL SPT-1, 1800mm  
 8~24V: 20AWG, UL 2468, 1800mm

<b>Tel: +86-20-81628973</b>	<b>Fax: +86-20-81628967</b>
<b>e-mail: sales@ceetus.com.cn</b>	<b>Website: www.ceetus.com.cn</b>



≤

## SA06-20(24)(30)S Series 20~30Watts Switching Adapter

### FEATURES

- CEC Efficiency Regulations Compliance
- Cispr 22'B', Vcci'B', Fcc'B' Compliance
- Light Weight: 210g only
- Efficiency 78%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Operating Temperature 0~40°C



### SPECIFICATION

Item \ Model	SA06-20S05R	SA06-20S07R	SA06-20S09R	SA06-24S12R	SA06-30S12R	SA06-30S17R
Output Voltage	5~7V	7~9V	9~12V	12~17V	12~17V	17~24V
Output Rating	20W Max	20W Max	20W Max	24W Max	30W Max	30W Max
Input Voltage	AC 90~264V					
Input Frequency	47~63Hz					
Input Current	0.8A Maximum					
Inrush Current	40A Maximum					
Line Regulation	2% Maximum					
Load Regulation	±5%					
Ripple & Noise	1% Maximum					
Efficiency	78% Typical					
Temperature Coefficient	0.05%/°C					
Over-Voltage Protection	Auto Recovery					
Short-circuit Protection	Auto Recovery					
Operating Temperature	0~40°C					
Storage Temperature	-20~85°C					
Safety	Pending					
EMC (EMI/EMS)	Pending					

(\*): Under Development (I/P): In Process (Pending): Pending


Above specification is for reference only, please contact for details.

<b>Tel:+86-20-81628973</b>	<b>Fax:+86-20-81628967</b>
<b>e-mail:sales@ceetus.com.cn</b>	<b>Website:www.ceetus.com.cn</b>




## ORDERING INFORMATION

SA06-24S12-U-1A

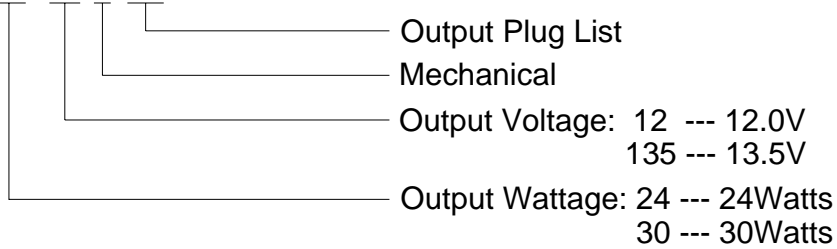

## MECHANICAL

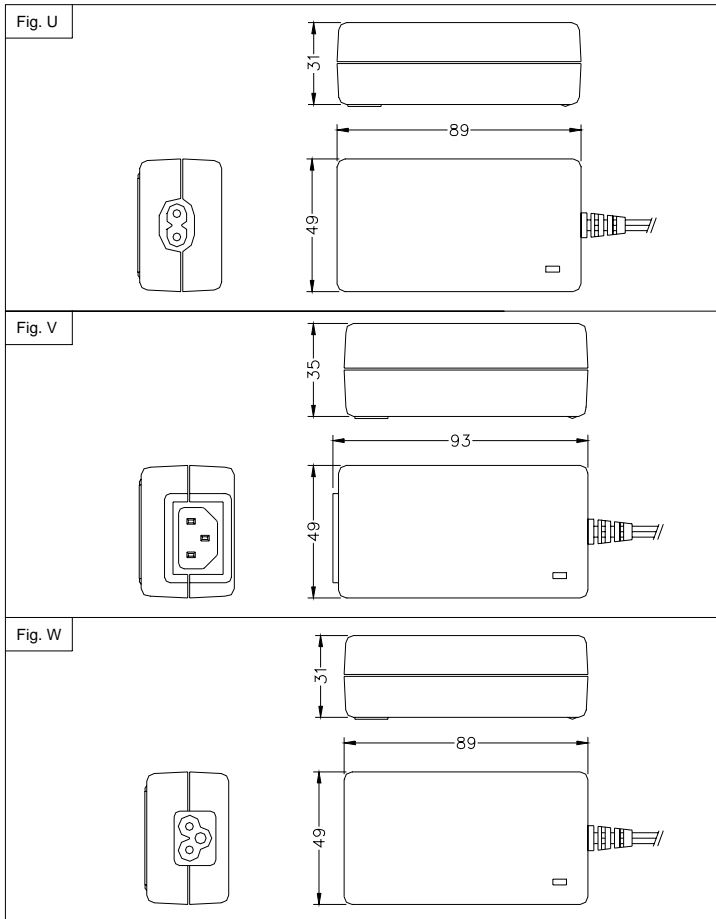

Unit: m.m.

Standard Output Cable:  
5~8V: 18AWG, UL SPT-1, 1200mm  
9~24V: 18AWG, UL SPT-1, 1800mm

**Tel:+86-20-81628973**

**Fax:+86-20-81628967**

**e-mail:sales@ceetus.com.cn**

**Website:www.ceetus.com.cn**



## A1 Series

## 15~18 Watts Switching Adapter

### FEATURES

- Cispr 22'B, 'Vcci'B', Fcc'B' Compliance
- Light Weight: 180g only
- Efficiency Over 70%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Operating Temperature 0~40°C



### SPECIFICATION

Item \ Model	A1-15S05	A1-18S05
Output Voltage	5V	5V
Output Current	3.0A	3.5A
Input Voltage	AC 90~264V	
Input Frequency	47~63Hz	
Input Current	0.6A Maximum	
Inrush Current	60A Maximum	
Line Regulation	2% Maximum	
Load Regulation	±5%	
Ripple & Noise	50mV Maximum	
Efficiency	72% Typical	74% Typical
Temperature Coefficient	0.05%/°C	
Over-Voltage Protection	Auto Recovery	
Short-circuit Protection	Auto Recovery	
Operating Temperature	0~40°C	
Storage Temperature	-20~85°C	
Safety	UL, CUL, TUV, PSE	
EMC (EMI/EMS)	C-TICK	

(\*): Under Development (I/P): In Process (Pending): Pending


Above specification is for reference only, please contact for details.

<b>Tel:+86-20-81628973</b>	<b>Fax:+86-20-81628967</b>
<b>e-mail:sales@ceetus.com.cn</b>	<b>Website:www.ceetus.com.cn</b>






## ORDERING INFORMATION

**A1-15S05-1A**

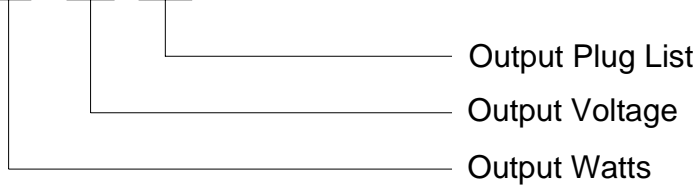

## MECHANICAL

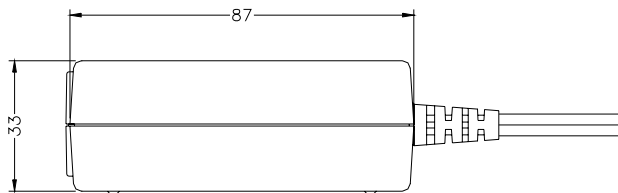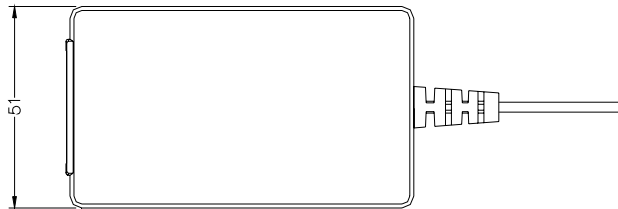

Unit: m.m.

Standard Output Cable:  
18AWG, UL SPT-1, 1200mm

<b>Tel:+86-20-81628973</b>	<b>Fax:+86-20-81628967</b>
<b>e-mail:sales@ceetus.com.cn</b>	<b>Website:www.ceetus.com.cn</b>



## A2-36S Series

## 36 Watts Switching Adapter

### FEATURES

- Cispr 22'B', Vcci'B', Fcc'B' Compliance
- Light Weight: 260g only
- Efficiency 84%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Operating Temperature 0~40°C



### SPECIFICATION

Item	Model	A2-36S12R
Output Voltage		12~17V
Output Rating		36W Max
Input Voltage		AC 90~264V
Input Frequency		47~63Hz
Input Current		1.2A Maximum
Inrush Current		60A Maximum
Line Regulation		2% Maximum
Load Regulation		±5%
Ripple & Noise		1% Maximum
Efficiency		84% Typical
Temperature Coefficient		0.05%/°C
Over-Voltage Protection		Auto Recovery
Short-circuit Protection		Auto Recovery
Operating Temperature		0~40°C
Storage Temperature		-20~85°C
Safety Description		UL, CUL, TUV, CB, BSMI, PSE
EMC (EMI/EMS)		BSMI

(\*): Under Development (I/P): In Process (Pending): Pending


Above specification is for reference only, please contact for details.

<b>Tel:+86-20-81628973</b>	<b>Fax:+86-20-81628967</b>
<b>e-mail:sales@ceetus.com.cn</b>	<b>Website:www.ceetus.com.cn</b>




## ORDERING INFORMATION

A2-36S12-U-A3

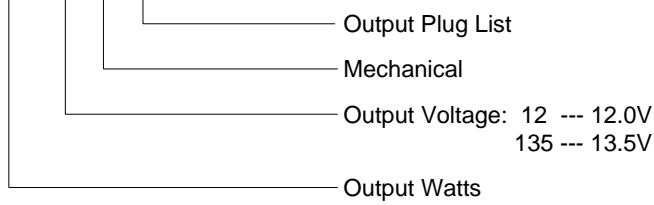


## MECHANICAL




U



V



W

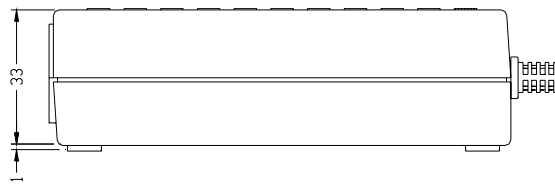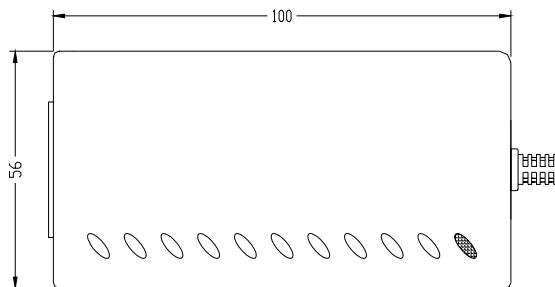

Unit: m.m.

Standard Output Cable:  
18AWG, UL SPT-1, 1200mm

Tel:+86-20-81628973

e-mail:sales@ceetus.com.cn

Fax:+86-20-81628967

Website:www.ceetus.com.cn



## A2-36SG Series

## 36 Watts Switching Adapter

### FEATURES

- CEC Efficiency Regulations Compliance
- Cispr 22'B', Vcci'B', Fcc'B' Compliance
- Light Weight: 260g only
- Efficiency 84%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Operating Temperature 0~40°C



### SPECIFICATION

Model	A2-36SG12R
Item	A2-36SG12R
Output Voltage	12~17V
Output Rating	36W Max
Input Voltage	AC 90~264V
Input Frequency	47~63Hz
Input Current	1.2A Maximum
Inrush Current	60A Maximum
Line Regulation	2% Maximum
Load Regulation	±5%
Ripple & Noise	1% Maximum
Efficiency	84% Typical
Temperature Coefficient	0.05%/°C
Over-Voltage Protection	Auto Recovery
Short-circuit Protection	Auto Recovery
Operating Temperature	0~40°C
Storage Temperature	-20~85°C
Safety	I/P (UL, CUL, TUV, CB, BSMI)
EMC (EMI/EMS)	I/P (CE, BSMI)

(\*): Under Development (I/P): In Process (Pending): Pending


Above specification is for reference only, please contact for details.

<b>Tel:+86-20-81628973</b>	<b>Fax:+86-20-81628967</b>
<b>e-mail:sales@ceetus.com.cn</b>	<b>Website:www.ceetus.com.cn</b>




## ORDERING INFORMATION

A2-36SG12-U-A3

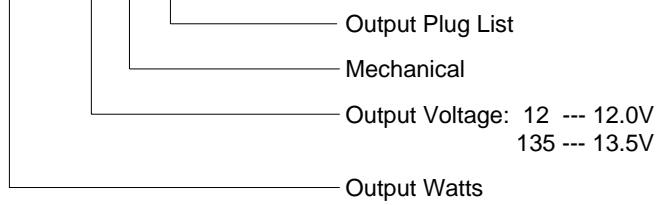


## MECHANICAL




U



V



W

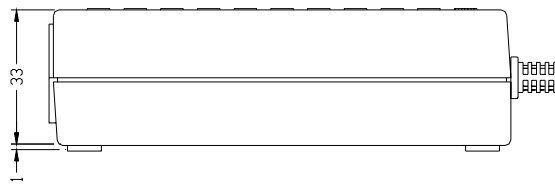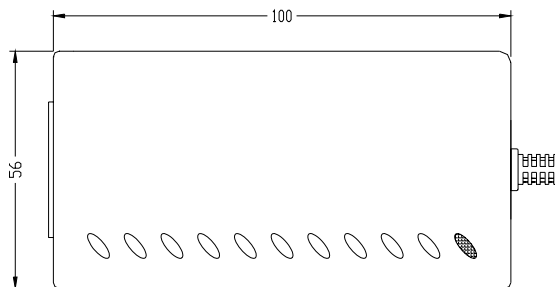

Unit: m.m.

Standard Output Cable:  
18AWG, UL SPT-1, 1200mm

Tel: +86-20-81628973

e-mail: sales@ceetus.com.cn

Fax: +86-20-81628967

Website: www.ceetus.com.cn



# CEETUS ENT. CORP

## A3-50(60)S Series 50~60 Watts Switching Adapter

### FEATURES

- CEC Efficiency Regulations Compliance
- Cispr 22'B', Vcci'B', Fcc'B' Compliance
- Light Weight: 280g only
- Efficiency 85%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Operating Temperature 0~35°C



### SPECIFICATION

Model	A3-50S12R	A3-50S17R	A3-60S12R	A3-60S17R
Item				
Output Voltage	12~17V	17~24V	12~17V	17~24V
Output Rating	50W Max		60W Max	
Input Voltage	AC 90~264V			
Input Frequency	47~63Hz			
Input Current	1.5A Maximum			
Inrush Current	100A Maximum			
Line Regulation	2% Maximum			
Load Regulation	±5%			
Ripple & Noise	1% Maximum			
Efficiency	85% Typical			
Temperature Coefficient	0.05%/°C			
Over-Voltage Protection	Auto Recovery			
Short-circuit Protection	Auto Recovery			
Operating Temperature	0~35°C			
Storage Temperature	-20~85°C			
Safety	I/P ( UL, CUL, TUV, CB, BSMI )			
EMC (EMI/EMS)	I/P ( CE, BSMI )			

(\*): Under Development (I/P): In Process (Pending): Pending

Above specification is for reference only, please contact for details.

**Tel:+86-20-81628973**

**Fax:+86-20-81628967**

**e-mail:sales@ceetus.com.cn**

**Website:www.ceetus.com.cn**



## ORDERING INFORMATION

A3-60S12-V-2A



Output Plug List

Mechanical

Output Voltage: 12 --- 12.0V  
135 --- 13.5V

Output Watts

## MECHANICAL

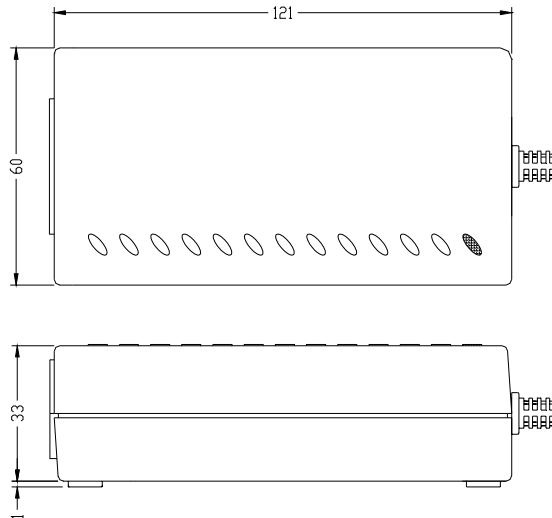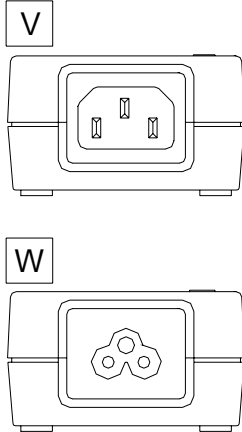

Unit: m.m.

Standard Output Cable:  
12~17V: 16AWG, UL 1571, 1200mm  
18~24V: 18AWG, UL SPT-1, 1200mm

Tel:+86-20-81628973

Fax:+86-20-81628967

e-mail:sales@ceetus.com.cn

Website:www.ceetus.com.cn



## A7-80(90)S Series

## 80~90 Watts Switching Adapter

### FEATURES

- Active PFC
- CEC Efficiency Regulations Compliance
- Cispr 22'B', Vcci'B', Fcc'B' Compliance
- Light Weight: 480g only
- Efficiency 85%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Operating Temperature 0~35°C



### SPECIFICATION

Model	A7-80S12R	A7-90S12R	A7-90S17R
Item			
Output Voltage	12~17V	12~17V	17~24V
Output Rating	80W Max	90W Max	90W Max
Input Voltage	AC 90~264V		
Input Frequency	47~63Hz		
Input Current	2.0A Maximum		
Inrush Current	100A Maximum		
Line Regulation	2% Maximum		
Load Regulation	±5%		
Ripple & Noise	1% Maximum		
Efficiency	82~87% Typical		
Temperature Coefficient	0.05%/°C		
Over-Voltage Protection	Auto Recovery		
Short-circuit Protection	Auto Recovery		
Operating Temperature	0~35°C		
Storage Temperature	-20~85°C		
Safety	Pending		
EMC (EMI/EMS)	Pending		

(\*): Under Development (I/P): In Process (Pending): Pending


Above specification is for reference only, please contact for details.

<b>Tel:+86-20-81628973</b>	<b>Fax:+86-20-81628967</b>
<b>e-mail:sales@ceetus.com.cn</b>	<b>Website:www.ceetus.com.cn</b>




## ORDERING INFORMATION

A7-80S12-V-2A

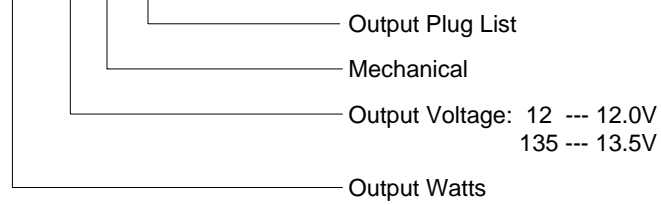

## MECHANICAL

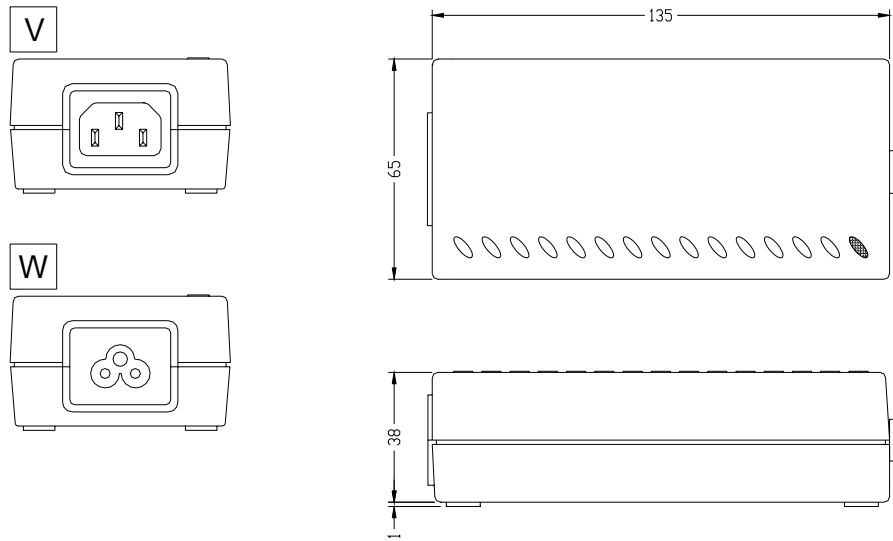

Unit: m.m.

Standard Output Cable:  
16AWG, UL 1571, 1200mm

<b>Tel:+86-20-81628973</b>	<b>Fax:+86-20-81628967</b>
<b>e-mail:sales@ceetus.com.cn</b>	<b>Website:www.ceetus.com.cn</b>



## A2-..D01 Series 25~29 Watts Dual Output Switching Adapter

### FEATURES

- Cispr 22'B', Vcci'B', Fcc'B' Compliance
- Efficiency Over 75%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Operating Temperature 0~40°C



### SPECIFICATION

Model	A2-25D01	A2-27D01	A2-29D01
Item			
Input Voltage	AC 90~264V		
Input Frequency	47~63Hz		
Input Current	1.0A Maximum		
Inrush Current	50A Maximum		
Efficiency	76% Typical		
Temperature Coefficient	0.05%/°C		
Hold-Up Time	16ms Minimum		
Over-Load Protection	110~200%(Auto-Recover)		
Over-Voltage Protection	Auto Recovery		
Short-circuit Protection	Auto Recovery		
Operating Temperature	0~40°C		
Storage Temperature	-20~85°C		
Weight	270g/9.6oz		
Safety	UL, CUL, TUV, CB, BSMI, PSE		
EMC (EMI/EMS)	CE, BSMI		

(\*): Under Development (I/P): In Process (Pending): Pending


Above specification is for reference only, please contact for details.

<b>Tel:+86-20-81628973</b>	<b>Fax:+86-20-81628967</b>
<b>e-mail:sales@ceetus.com.cn</b>	<b>Website:www.ceetus.com.cn</b>




## ORDERING INFORMATION

A2-25D01-U-D3

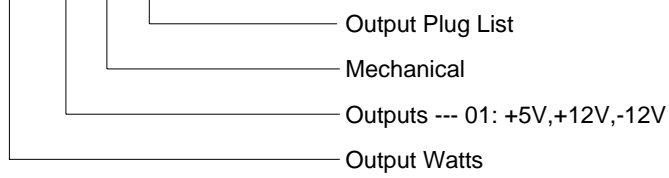


## MECHANICAL




U



V



W

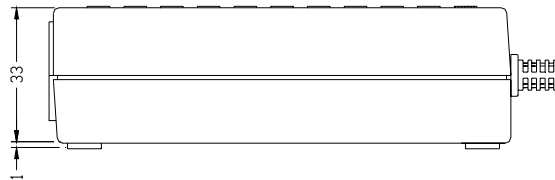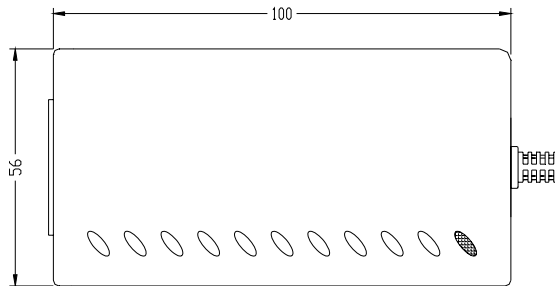

Unit: m.m.

## OUTPUTS

Model No.	Vo	Load			Regulation		Tolerance	Ripple & Noise
		Min.	Rated	Surge	Line	Load		
A2-25D01	Vo1 +5V	0.5A	1.5A	---	1.0%	5.0%	±5.0%	50mV
	Vo2 +12V	0.5A	1.5A	---	1.0%	5.0%	±5.0%	100mV
A2-27D01	Vo1 +5V	0.5A	3.0A	---	1.0%	5.0%	±5.0%	50mV
	Vo2 +12V	0.5A	1.0A	---	1.0%	5.0%	±5.0%	100mV
A2-29D01	Vo1 +5V	0.5A	1.5A	---	1.0%	5.0%	±5.0%	50mV
	Vo2 +12V	0.5A	1.8A	---	1.0%	5.0%	±5.0%	100mV

Standard Output Cable:  
20AWG, UL 2464/3C/Shielding, 1500mm, EMI Core

<b>Tel:+86-20-81628973</b>	<b>Fax:+86-20-81628967</b>
<b>e-mail:sales@ceetus.com.cn</b>	<b>Website:www.ceetus.com.cn</b>



## T40-9312 Series 43 Watts Triple Output Switching Adapter

### FEATURES

- Cispr 22'B', Vcci'B', Fcc'B' Compliance
- Efficiency Over 70%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Operating Temperature 0~40°C



### SPECIFICATION

Item	Model	T40-9312	T40-9312A
Input Voltage		AC 90~264V	
Input Frequency		47~63Hz	
Input Current		1.5A Maximum	
Inrush Current		30A Maximum	
Efficiency		73% Typical	
Temperature Coefficient		0.05%/°C	
Hold-Up Time		20ms Minimum	
Over-Load Protection		110~160%(Auto-Recover)	
Over-Voltage Protection		Auto Recovery	
Short-circuit Protection		Auto Recovery	
Operating Temperature		0~40°C	
Storage Temperature		-20~85°C	
Weight		520g/18.4oz	
Safety		UL, CSA, TUV	UL, CUL, TUV, CCC
EMC (EMI/EMS)		CE	


(\*): Under Development (I/P): In Process (Pending): Pending  
 Above specification is for reference only, please contact for details.

<b>Tel:+86-20-81628973</b>	<b>Fax:+86-20-81628967</b>
<b>e-mail:sales@ceetus.com.cn</b>	<b>Website:www.ceetus.com.cn</b>




## ORDERING INFORMATION

T40-9312A-F4

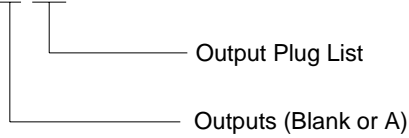

## MECHANICAL

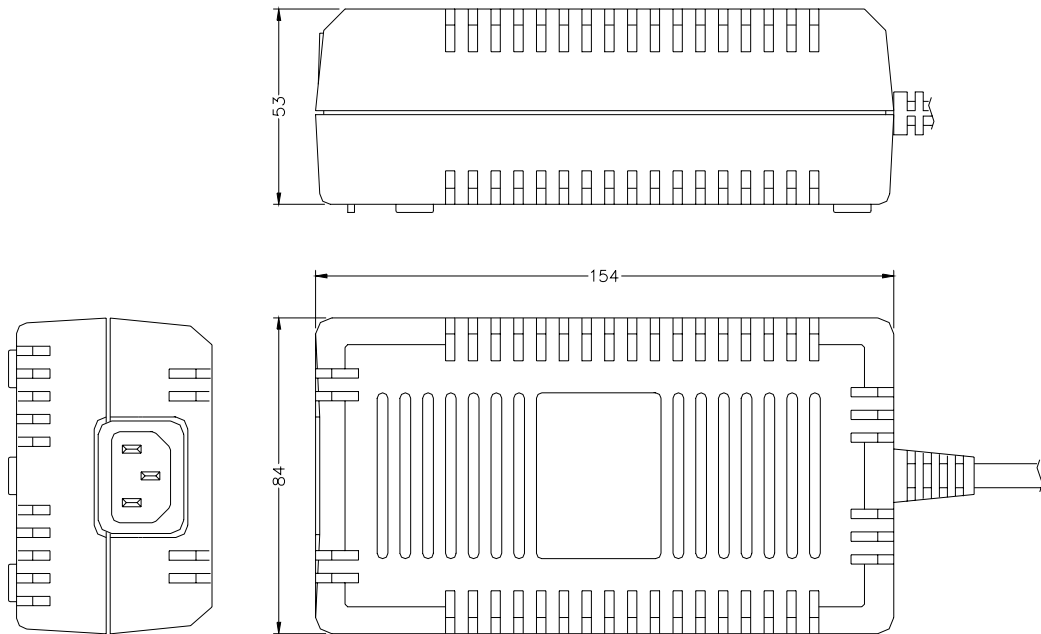

Unit: m.m.

## OUTPUTS

Model No.	Vo		Load			Regulation		Tolerance	Ripple & Noise
			Min.	Rated	Surge	Line	Load		
T40-9312	Vo1	+5V	0.3A	1.8A	4.5A	1.0%	3.0%	±3.0%	50mV
	Vo2	+15V	0.2A	2.0A	2.4A	1.0%	5.0%	+10/-5%	150mV
	Vo3	-15V	0.0A	0.3A	---	1.0%	5.0%	+10/-5%	200mV
T40-9312A	Vo1	+5V	0.3A	5.0A	---	1.0%	3.0%	±4.0%	50mV
	Vo2	+12V	0.2A	1.2A	2.5A	1.0%	3.0%	±5.0%	120mV
	Vo3	-12V	0.0A	0.3A	---	1.0%	5.0%	+10/-5%	120mV

Standard Output Cable:  
20AWG, UL 2464/5C/Shielding, 1000mm, EMI Core.

<b>Tel:+86-20-81628973</b>	<b>Fax:+86-20-81628967</b>
<b>e-mail:sales@ceetus.com.cn</b>	<b>Website:www.ceetus.com.cn</b>



## SP9812 Series 25 Watts Dual Output Switching Adapter

### FEATURES

- Cispr 22'B', Vcci'B', Fcc'B' Compliance
- Efficiency Over 70%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Operating Temperature 0~40°C



### SPECIFICATION

Model	SP9812	SP9812A
Item		
Input Voltage	AC 90~264V	
Input Frequency	47~63Hz	
Input Current	1.0A Maximum	
Inrush Current	50A Maximum	
Efficiency	73% Typical	
Temperature Coefficient	0.05%/°C	
Hold-Up Time	16ms Minimum	
Over-Load Protection	110~200%(Auto-Recover)	
Over-Voltage Protection	Auto Recovery	
Short-circuit Protection	Auto Recovery	
Operating Temperature	0~40°C	
Storage Temperature	-20~85°C	
Weight	420g/14.9oz	
Safety	UL, CUL, TUV, BSMI	
EMC (EMI/EMS)	CE, BSMI	

(\*): Under Development (I/P): In Process (Pending): Pending

Above specification is for reference only, please contact for details.

Tel:+86-20-81628973

Fax:+86-20-81628967


e-mail:sales@ceetus.com.cn

Website:www.ceetus.com.cn




## ORDERING INFORMATION

SP9812A-D3

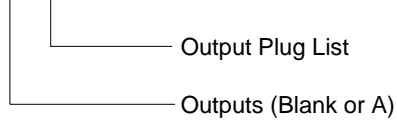

## MECHANICAL

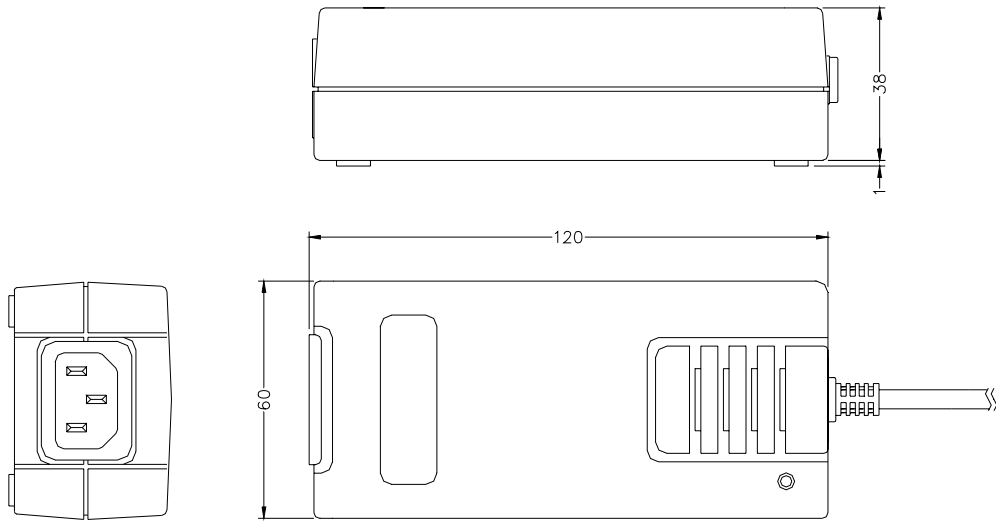

Unit: m.m.

## OUTPUTS

Model No.	Vo	Load			Regulation		Tolerance	Ripple & Noise
		Min.	Rated	Surge	Line	Load		
SP9812	Vo1 +5V	0.5A	1.5A	---	1.0%	5.0%	±5.0%	50mV
	Vo2 +12V	0.5A	1.5A	---	1.0%	5.0%	±5.0%	100mV
SP9812A	Vo1 +5V	0.5A	3.0A	---	1.0%	5.0%	±5.0%	50mV
	Vo2 +12V	0.5A	1.0A	---	1.0%	5.0%	±5.0%	100mV

Standard Output Cable:  
20AWG, UL 2464/3C/Shielding, 1500mm

<b>Tel:+86-20-81628973</b>	<b>Fax:+86-20-81628967</b>
<b>e-mail:sales@ceetus.com.cn</b>	<b>Website:www.ceetus.com.cn</b>







## Output Plug List

M6-7US05-A

A1

A

A	Cable with ferrite core for standard plugs
Blank	Cable with/without ferrite core for special plugs

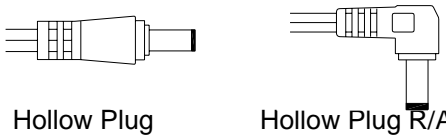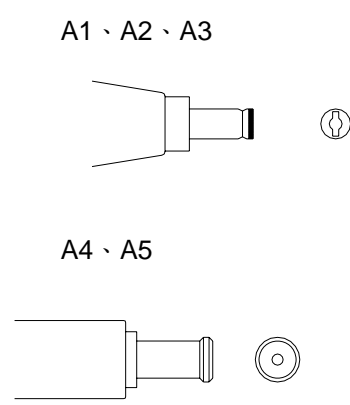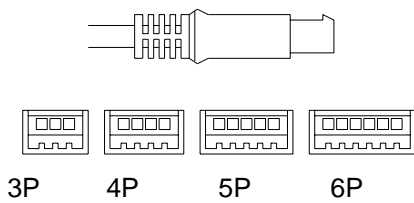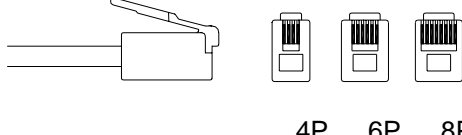Plug No.	Plug Name	I.D.	O.D.	Length	Plug Outline	
<b>Standard Plugs</b>						
1	Hollow Plug	1.35	3.5	6-12	 <p>Hollow Plug      Hollow Plug R/A</p>	
2		2.1	5.5	7-10		
3		2.1	5.5	10.5-14		
4	Hollow Plug R/A	1.35	3.5	6-12		
5		2.1	5.5	7-10		
6		2.1	5.5	10.5-14		
7	Hollow Plug	2.5	5.5	8-14		 <p>A1 · A2 · A3</p> <p>A4 · A5</p>
8	Hollow Plug R/A	2.5	5.5	8-14		
A1	EIAJ-1	0.7	2.35	6-12		
A2	EIAJ-2	1.7	4.0	7-12		
A3	EIAJ-3	1.7	4.75	7-12		
A4	EIAJ-4	1.0/3.3	5.5	9.5		
A5	EIAJ-5	1.37/4.4	6.5	9.5		
A1R	EIAJ-1 R/A	0.7	2.35	6-12		
A2R	EIAJ-2 R/A	1.7	4.0	7-12		
A3R	EIAJ-3 R/A	1.7	4.75	7-12		
A4R	EIAJ-4 R/A	1.0/3.3	5.5	9.5		
A5R	EIAJ-5 R/A	1.37/4.4	6.5	9.5		
B1	MOLEX 3.96mm	3 Pin			 <p>3P    4P    5P    6P</p>	
B2		4 Pin				
B3		5 Pin				
B4		6 Pin				
C1	RJ Series	4 Pin			 <p>4P    6P    8P</p>	
C2		6 Pin				
C3		8 Pin				






















Tel:+86-20-81628973

Fax:+86-20-81628967

e-mail:sales@ceetus.com.cn

Website:www.ceetus.com.cn



D1	Mini-DIN (male)	3 Pin	 
D2		4 Pin	
D3		5 Pin	
D4		6 Pin	
D5		7 Pin	
D6		8 Pin	
E1	Power Mini-DIN (male)	3 Pin	  
E2		4 Pin	
F1	DIN (male)	3 Pin	      
F2		4 Pin	
F3		5 Pin	
F4		5 Pin-1	
F5		6 Pin	
F6		7 Pin	
F7		8 Pin	
<b>Special Plugs</b>			
T	Interchangeable	2 Pin	 
USB	USB	4 Pin	 
SUSB	Mini-USB	4 Pin	 
MUSB	Mini-USB	5 Pin	 
Tinned	Strip&Tinned	---	

\* Other Special plugs are available, please ask for details.

Tel:+86-20-81628973

Fax:+86-20-81628967

e-mail:sales@ceetus.com.cn

Website:www.ceetus.com.cn